


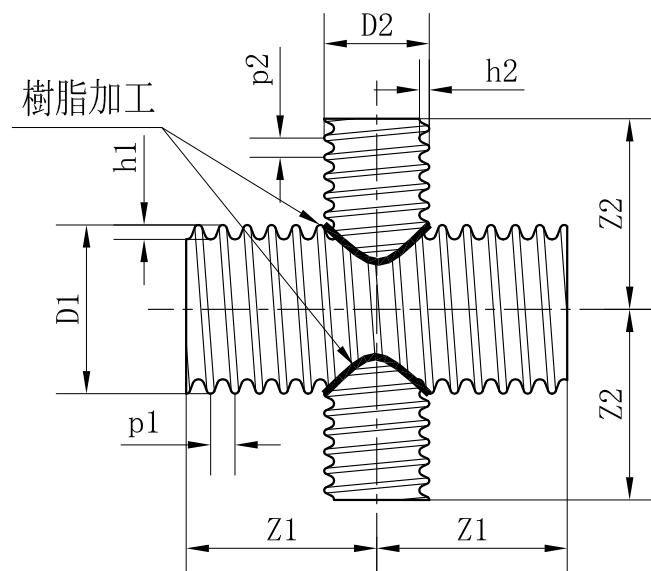

(単位 mm)

寸 法 呼び径	外 径	ピッチ	波深さ	外 径	ピッチ	波深さ	長 さ		
	D1	p1	h1	D2	p2	h2	Z1	Z2	
S800	×S100	887.0	128.0	76.0	114.0	38.0	14.0	800	650
	×S150				177.0	50.5	18.0	800	700
	×S200				222.0	50.5	22.0	850	700
	×S250				276.0	50.5	26.0	850	700
	×S300				330.0	63.5	30.0	900	800
	×S350				388.0	56.0	33.0	900	750
	×S400				443.0	64.0	38.0	950	800
	×S450				497.5	72.0	42.5	950	850
	×S500				554.0	80.0	47.5	1,000	850
	×S600				664.0	96.0	57.0	1,050	950
	×S700				777.0	112.0	68.0	1,100	1,050
S900	×S100	999.0	144.0	89.0	114.0	38.0	14.0	850	700
	×S150				177.0	50.5	18.0	850	750
	×S200				222.0	50.5	22.0	900	750
	×S250				276.0	50.5	26.0	900	750
	×S300				330.0	63.5	30.0	950	850
	×S350				388.0	56.0	33.0	950	800
	×S400				443.0	64.0	38.0	1,000	850
	×S450				497.5	72.0	42.5	1,000	900
	×S500				554.0	80.0	47.5	1,050	900
	×S600				664.0	96.0	57.0	1,100	1,000
	×S700				777.0	112.0	68.0	1,150	1,100
	×S800				887.0	128.0	76.0	1,200	1,200

備考

管の許容差は、角度 $\pm 3^{\circ}$ 長さ $+10 \cdot -0\%$ とします。

品名	クリモトシングルプレス管 異径クロス	作成日	2017.08.03
クリモトポリマ-株式会社		図番	CSP-C0005-00