


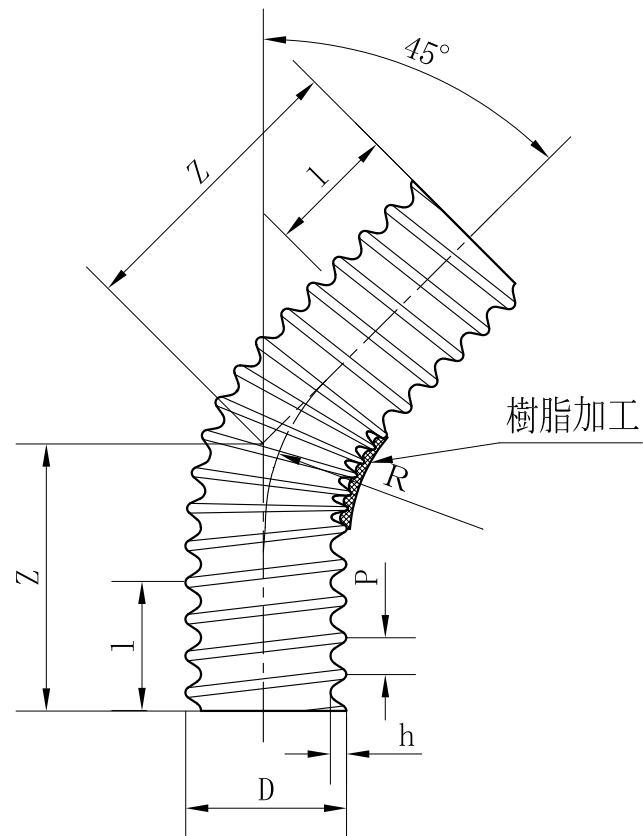

(単位 mm)

寸法 呼び径	外径 D	接続部 l	長さ Z	ピッチ p	波深さ h	曲り R
S- 100	114.0	200	300	38.0	14.0	250
S- 150	177.0	250	400	50.5	18.0	300
S- 200	222.0	250	400	50.5	22.0	350
S- 250	276.0	250	450	50.5	26.0	400
S- 300	330.0	350	550	63.5	30.0	450
S- 350	388.0	300	500	56.0	33.0	450
S- 400	443.0	350	600	64.0	38.0	550
S- 450	497.5	400	650	72.0	42.5	600
S- 500	554.0	400	700	80.0	47.5	700
S- 600	664.0	500	850	96.0	57.0	800
S- 700	777.0	600	1,000	112.0	68.0	900
S- 800	887.0	700	1,150	128.0	76.0	1,000
S- 900	999.0	750	1,200	144.0	89.0	1,100
S- 1000	1,110.0	850	1,350	160.0	97.0	1,200

品名	クリモトシングルプレス管 45° エルボ	作成日	2021-03-10
	クリモトポリマ-株式会社	図番	CSP-L0005-02