


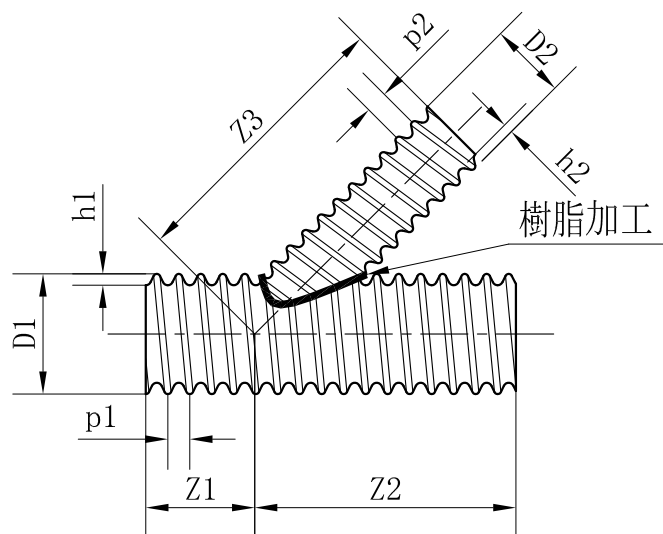

(単位 mm)

寸 法 呼び径	外 径	ピッチ	波深さ	外 径	ピッチ	波深さ	長 さ			
	D1	p1	h1	D2	p2	h2	Z1	Z2	Z3	
S600	×S100	664.0	96.0	57.0	114.0	38.0	14.0	250	1,250	800
	×S150				177.0	50.5	18.0	300	1,300	900
	×S200				222.0	50.5	22.0	350	1,350	950
	×S250				276.0	50.5	26.0	350	1,350	1,000
	×S300				330.0	63.5	30.0	400	1,400	1,150
	×S350				388.0	56.0	33.0	450	1,450	1,150
	×S400				443.0	64.0	38.0	500	1,500	1,250
	×S450				497.5	72.0	42.5	550	1,500	1,350
	×S500				554.0	80.0	47.5	550	1,550	1,450
S700	×S100	777.0	112.0	68.0	114.0	38.0	14.0	300	1,500	900
	×S150				177.0	50.5	18.0	350	1,550	1,000
	×S200				222.0	50.5	22.0	400	1,550	1,050
	×S250				276.0	50.5	26.0	450	1,600	1,100
	×S300				330.0	63.5	30.0	450	1,650	1,250
	×S350				388.0	56.0	33.0	500	1,700	1,250
	×S400				443.0	64.0	38.0	550	1,700	1,350
	×S450				497.5	72.0	42.5	600	1,750	1,450
	×S500				554.0	80.0	47.5	650	1,800	1,550
	×S600				664.0	96.0	57.0	700	1,850	1,750

備考

管の許容差は、角度 $\pm 3^{\circ}$ 長さ $+10 \cdot -0\%$ とします。

品名	クリモトシングルプレス管 異径Yチーズ	作成日	2017.08.03
	クリモトポリマ-株式会社	図番	CSP-YT0004-00