


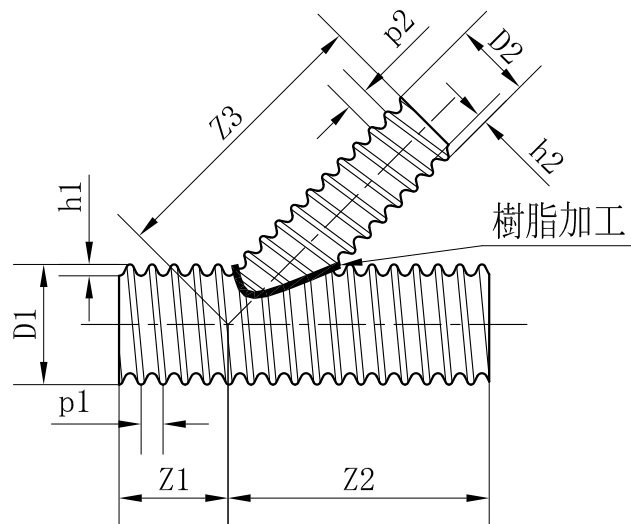

(単位 mm)

呼び径	寸 法	外 径	ピッチ	波深さ	外 径	ピッチ	波深さ	長 さ		
		D1	p1	h1	D2	p2	h2	Z1	Z2	Z3
S800	×S100	887.0	128.0	76.0	114.0	38.0	14.0	350	1,700	950
	×S150				177.0	50.5	18.0	400	1,750	1,050
	×S200				222.0	50.5	22.0	450	1,750	1,100
	×S250				276.0	50.5	26.0	500	1,800	1,200
	×S300				330.0	63.5	30.0	500	1,850	1,350
	×S350				388.0	56.0	33.0	550	1,900	1,350
	×S400				443.0	64.0	38.0	600	1,950	1,450
	×S450				497.5	72.0	42.5	650	1,950	1,550
	×S500				554.0	80.0	47.5	650	2,000	1,600
	×S600				664.0	96.0	57.0	750	2,100	1,800
	×S700				777.0	112.0	68.0	850	2,150	2,050
S900	×S100	777.0	112.0	68.0	114.0	38.0	14.0	350	1,500	1,100
	×S150				177.0	50.5	18.0	400	1,500	1,150
	×S200				222.0	50.5	22.0	450	1,550	1,200
	×S250				276.0	50.5	26.0	450	1,600	1,250
	×S300				330.0	63.5	30.0	500	1,650	1,350
	×S350				388.0	56.0	33.0	550	1,650	1,350
	×S400				443.0	64.0	38.0	600	1,700	1,400
	×S450				497.5	72.0	42.5	650	1,750	1,500
	×S500				554.0	80.0	47.5	650	1,800	1,550
	×S600				664.0	96.0	57.0	750	1,850	1,700
	×S700				777.0	112.0	68.0	800	1,950	1,850
	×S800				887.0	128.0	76.0	900	2,000	2,000

備考

管の許容差は、角度 $\pm 3^\circ$ 長さ $+10 \cdot -0\%$ とします。

品名	クリモトシングルプレス管 異径Yチーズ	作成日	2017.08.03
クリモトポリマ-株式会社		図番	CSP-YT0005-00